



MT-2007N

Protective Function Analogue Multimeter

- Durable reliable vibration-proof and patented protection circuit
- Double-sided glass epoxy through hole resist finish
- Protective function preventing mixed measurements
- Resistance, current and low-range voltage.
- DCV: 0.1/0.5/2.5/10/50/250/1000V (DC 20KΩ/V)
- DCA: 50 μ /2.5m/25m/250m/10A
- ACV: 10/50/250/1000V (AC 9KΩ/V)
- Resistance: 1/10/1K/10KΩ
- Capacitance: C1(Rx1K): 2000 μ F, C2: 0.025/025/25 μ F (OPTION MT-2007-C)
- Battery: 1.5/9V
- Continuity checking with buzzer



Individual Packing	Weight (g)
Color Box	403

MT-2008N

Protective Function Analogue Multimeter

- Durable reliable vibration-proof and patented protection circuit
- Double-sided glass epoxy through hole resist finish
- Protective function preventing mixed measurements
- Resistance, current and low-range voltage.
- DCV: 0.1/0.5/2.5/10/50/250/1000V (DC 20KΩ/V)
- DCmA: 50 μ /2.5m/25m/250mA
- ACV: 10/50/250/1000V (AC 9KΩ/V)
- Resistance: 1/10/100/1K/10KΩ
- Capacitance: C1(Rx1K): 2000 μ F, C2: 0.025/025/25 μ F (OPTION MT-2007-C)
- Battery: 1.5/9V



Individual Packing	Weight
Color Box	392


MT-2007-C

Capacitor Tester

This Accessory Capacitance Tester is an small, safe, battery operated, easy to operate accessory tester for measuring the capacitance on linearity feature with analogue multimeter. Its measuring scopes cover from 100pF to 25uF with three ranges 0.025-0.25-25uF. It can offer accurate, reliable measurements of capacitance with capacitor jacks and power switch & LED light indicating, as well as the wire leads connected to the multimeter. Moreover, it can also be used on the analog multimeter for capacitance tests.

Specifications:

- One-year warranty.
- Common Environment: 23°C±5°C, less than 75% RH.
- Operating Temperature Range: 0°C to 40°C, 32°F to 104°F.
- Storage Temperature Range: -10°C to 50°C, 14°F to 122°F
- Humidity Tolerance: Operating range less than 90% RH. Storage range: less than 80% RH.
- Range: 0.025-0.25-25uF
- Power: NEDA 6F22 9V 1pc
- Size: 112(W)x 46(D)x 26(H) mm
- Weight: 50g approx. (including battery 006P 9V 1pc)

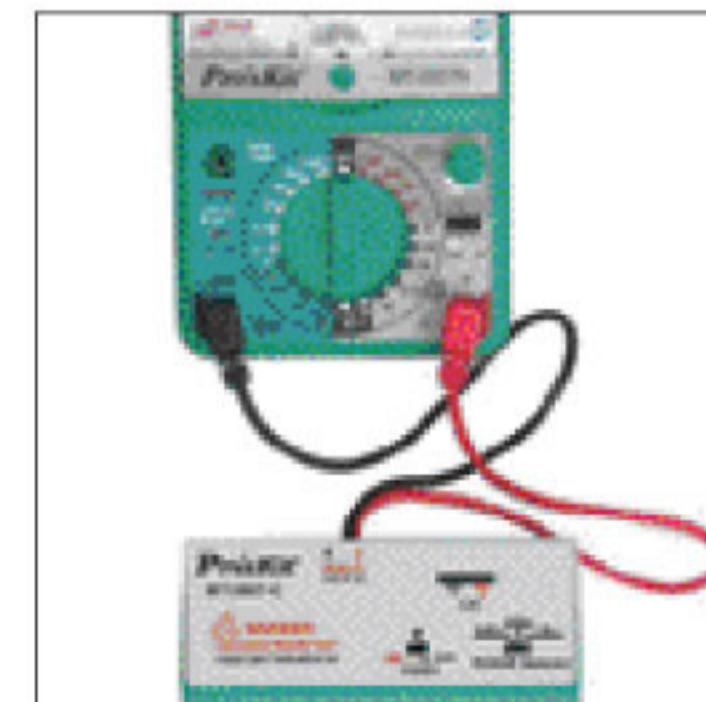

Individual Packing	Weight
Blister Card	145

※ Please operate MT-2007-C with MT-2007N or MT-2008N in coordination.